



computer SMART III 6

computer SMART III 6, Power factor regulator

Code: R13851.

- > Alarm relay: Yes
- > Communications: RS-485
- > Measurement Range (V): 20...300
- > I Δ n (A): yes
- > Power supply (Vac): 100...520 Vac
- > Nr steps: 6
- > Input current: .../5A | .../1A
- > Switching unit: Contactor

Description

Measurement with three current transformers guarantees an analogue reading of the company meter. The **Computer SMART III** reactive energy regulator is the only regulator on the market that offers the possibility of using 3 measurement transformers in addition to the conventional method of measuring with a single current transformer, as well as providing the functions of an integral power analyzer and controlling residual leakage currents (**WG** series current transformers).

Computer SMART III is a regulator that ensures excellent preventive maintenance by means of programming its alarms and the options for testing the capacitor status, offering maximum supervision and safety of your compensation unit.

Application

The connection of 1 or 3 transformers makes **Computer SMART III** the perfect regulator in any installation, allowing the following:

- Changing from 1 to 3 transformers in the following cases:
 - Changes in reactive energy penalties
 - Changes in consumption habits
 - Significant imbalances in the system
- Replacing the regulator of any capacitor bank
- Perfect for installations with up to 4 objective $\cos \varphi$, since it can adapt to any compensation need (different time periods).
- It can be used with Medium Voltage compensation units.



computer SMART III 6

Code: R13851.

Specifications

AC power supply

Installation category	CAT III 300 V
Consumption	10 ... 16 VA
Frequency	50 ... 60 Hz
Nominal voltage	100 ... 520 V ~

Mechanical characteristics

Size (mm) width x height x depth	144 x 144 x 71 (mm)
Envelope	Plastic V0 self-extinguishing
Fastening	Panel
Weight (kg)	0,57

Environmental characteristics

Protection class	IP 51 (Front), IP 31 (unmounted)
Relative humidity (without condensation)	5 ... 95%
Storage temperature	-20 ... +70 °C
Working temperature	-10 ... +55 °C

Current measurement circuit

Nominal current (In)	.../5A ó .../1A
Phase current measuring range	1 ... 120 % In
Minimum current measurement	50 mA

Voltage measurement circuit

Installation category	CAT III 300 V
Sampling frequency	45 ... 65 Hz
Input impedance	660 kΩ
Voltage measuring range	45 ... 65 Hz
Nominal voltage	230 V Ph-N, 400 V Ph-Ph
Minimum measurement voltage (Vstart)	20 V F-N, 35 V F-F

Communications

Fieldbus (ModBus)	RS-485
Stop bits (ModBus)	1-2
Parity	without, even, odd
Protocol	Modbus RTU
Speed	9600-19200

Standards

Electrical safety, Maximum height (m)	2000
---------------------------------------	------



computer SMART III 6

Code: R13851.

Standards

IEC 61010, IEC 61000-6-2, IEC 61000-6-4, Medidas conforme a : IEC 61557-12

User interface

LED	4 LED
Keyboard	Capacitive, 5 keys
Display type	LCD Custom COG

Digital inputs

Input/output insulation	Optoisolated
Quantity	2
Type	Potential-free contact

Leakage current measurement (ID)

Secondary nominal current	0,003 A
Minimum current measurement (Istart)	10 mA
Measurement range	0,01 ... 1,5 A

Digital relay outputs

Quantity	8 (6 salidas, 1 ventilador, 1 alarma)
Maximum current	1A
Maximum open contact voltage	1 kV
Electrical life	30 x 10 ³ ciclos
Mechanical life	5 x 10 ⁶ Cycles
Maximum switching capacity	2500 VA

Digital transistor outputs

Quantity	2
Type	NPN
Maximum current	50 mA
Maximum voltage	24 Vcc

Measurement accuracy

Phase current measurement	0.5% ± 1 digit
Reactive energy measurement (kvarh)	Class 1
Reactive power measurement (kvar)	1% ± 2 digit
Active energy measurement (kWh)	Class 1
Active power measurement (kW)	0.5% ± 2 digits
Phase voltage measurement	0.5% ± 1 digit

computer SMART III

Three-phase power factor regulators. Regulation, measurement, leakage control and communications



computer SMART III 6

Code: R13851.



CODE	TYPE	Switching unit	Nr steps	Input current
R13851.	computer SMART III 6	Contactora	6	.../5A .../1A
R13862.	computer SMART III 12	Contactora	12	.../5A .../1A
R13864.	computer SMART III 14	Contactora	14	.../5A .../1A



computer SMART III 6

Code: R13851.

Dimensions

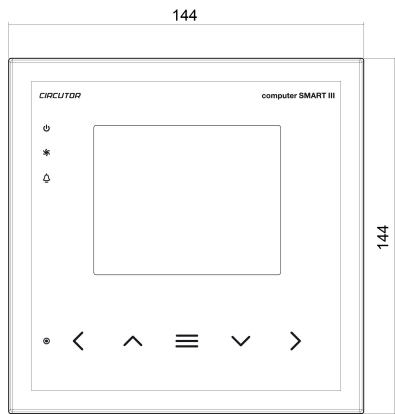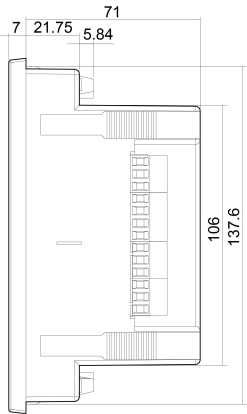

Connections

