

## TEST REPORT

REPORT NO. IN 42804 VOC  
STANDARD NO: EN 60831-1

14/08/2021 -20/08/2021 P/I NO. : IR-20210523-2

TEST DATE:  
dtd:23.05.2021

PRODUCT: 40 KVAR, 440V, 3PH, 50Hz, HEAVY DUTY FT CAP MPP TYPE CAPACITOR UNITS.

Sr. No.	REQUIREMENT /TEST	SPECIFICATIONS	RESULT	REMARK
1.	KVAR Rating	40 KVAR	40 KVAR	PASS
2.	Voltage Rating	440 V	440 V	PASS
3.	Basic Mfd value in Mfd	32 μfd	32 μfd	PASS
4.	Sr. No. of the Capacitor	A885050	A885050	PASS
5.	Capacitor Type	Heavy Duty cap	Heavy Duty cap	PASS
6.	Frequency	50 Hz or 60Hz	50 HZ	PASS
7.1	Capacitance Measurement and Output Calculation before H <sub>2</sub>	-5% to +15% for units and ranges upto 100 KVAR	332 μfd	PASS
7.2	Capacitance Measurement and Output Calculation after H <sub>2</sub>	0% to 10% for units and ranges above 100 KVAR	332 μfd	PASS
8	Measurement of the tangent of the loss angle (tan δ) of the capacitor	Shall not exceed value declared by manufacture	0.4% Watt/Ar	PASS
9	Voltage tests between Terminals High Voltage test	2.15 x Rated Voltage for 2 sec	Withstood	PASS
10	Voltage tests between terminals and container	3 KV AC for 10 Sec	Withstood	PASS
11	Test of internal discharge device	In 3 min reduce to 75% or less	31 sec.	PASS
12	Sealing Test Leakage Test	75°C for 2 Hrs	No leakage	PASS
13	<p><b>Guide for Installation and Operation of L.T. Power Capacitors:</b></p> <p>General</p> <p>Choice of rated Voltage</p> <p>Operating temperature</p> <p>Installation</p> <p>High Ambient air temperature</p> <p>Evaluation of losses</p> <p>Special Service conditions</p> <p>Over voltages</p> <p>Overload currents</p> <p>Switching and protective devices and connections</p> <p>Capacitors connected to system with Audio frequency remote control</p> <p><b>EMC</b></p> <p>Immunity</p>		The installation manual attached	Pass



## TEST REPORT


REPORT NO. IN 42804 VOC  
STANDARD NO: EN 60831-1  
14/08/2021 -20/08/2021 P/I NO. : IR-20210523-2

TEST DATE:  
dtd:23.05.2021

PRODUCT: 40 KVAR, 440V, 3PH, 50Hz, HEAVY DUTY FTCAP MPP TYPE CAPACITOR UNITS.

### RATING PLATE DETAILS

MANUFACTURER	M/s.ShreemElectic Ltd.
IDENTIFICATION NUMBER AND MANUFACTURING YEAR	A885050 08-2021
RATED OUTPUT $Q_N$ IN KVAR	40Kvar
RATED VOLTAGE $U_N$ IN VOLTS	440 volt
RATED FREQUENCY $f_N$ IN Hz	50 HZ
TEMPERATURE CATEGORY	-40/D
DISCHARGE DEVICE	Ext.Fitted
REFERENCE OF SELF HEALING DESIGN	MPP (SH)
CONNECTION SYMBOL	Delta ( $\Delta$ )
INTERNAL FUSES	No
INDICATION OF OVERPRESSURE OR THERMAL DISCONNECTOR	Provided Internally
INSULATION LEVEL $U_i$ IN KV	3 Kv
REFERENCE TO IEC 60831	IEC 60831-1

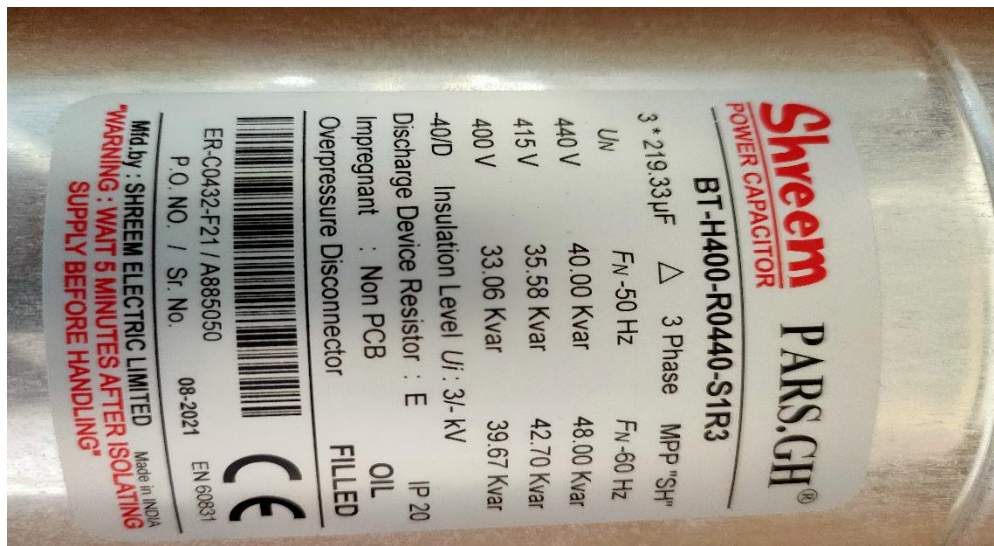

**CONCLUSION:** Place and date of inspection at Shreem Electric limited located in Kolhapur India on 14/08/2021 and the sample test performed by manufacturer from 14/08/2021 to 20/08/2021. Sample test witnessed by our SAI inspector in laboratory of the manufacturer and concluded that the goods are in conformity with standard No.: EN 60831-1 Furthermore, we confirm that the test report is acceptable and the manufacturer's laboratory found to be as qualified.

Manufacturer's Representative

S.A.I. Representative



**Shreem Electric Ltd.**  
Industrial Estate,  
Jaysingpur - 416 144,  
Dist. : Kolhapur, Maharashtra, (INDIA)

Tel : +91-2322-221021/22/24/45  
Fax : +91-2322-221023  
e-mail : info@shreemelectric.com  
Web : www.shreemelectric.com

